

551, 338

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 October 2004 (28.10.2004)


PCT

(10) International Publication Number
WO 2004/093097 A2

- (51) International Patent Classification⁷: **H01B** (74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171, N-4302 Sandnes (NO).
- (21) International Application Number: PCT/NO2004/000088 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 26 March 2004 (26.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20031487 1 April 2003 (01.04.2003) NO
- (71) Applicant (for all designated States except US): SMED-VIG OFFSHORE AS [NO/NO]; P.O. Box 110, N-4001 Stavanger (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): FJELDE, Ole, Gunnar [NO/NO]; Kuvikveien 54, N-4120 Tau (NO).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A DISCONNECTION DEVICE FOR A WIRELINE

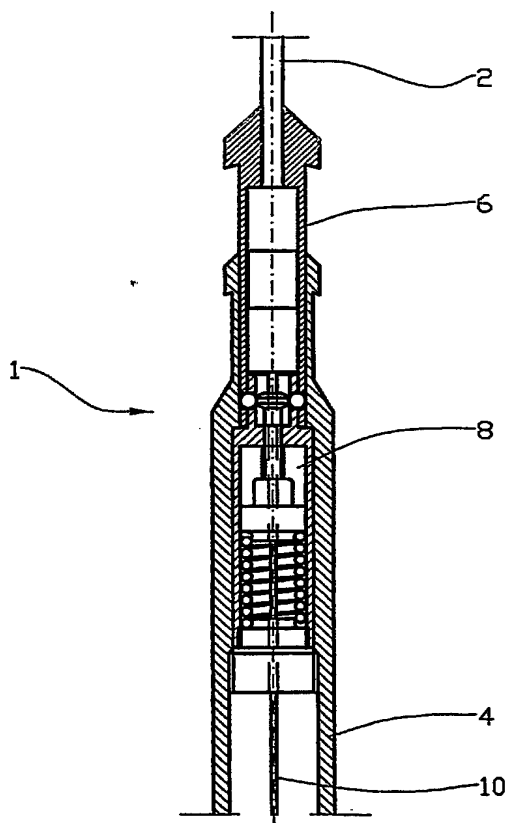

(57) Abstract: A device for connection of a wireline (2) provided with a conductor (10), the wireline (2) being intended particularly for a wireline tool (4), wherein the wireline is provided with a wireline connector (6) in which each wireline strand layer (12, 14) is biased and clamped between an inner sleeve (16, 26) and an outer sleeve (18, 28), and wherein the tensile load of the wireline (2) is transmitted to a fastening element (38) via the outer sleeves (18, 28), the wireline connector (6) being connected to the wireline tool (4) by means of a releasable disconnection device (8).

WO 2004/093097 A2



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*